

**G083 - EVODUO**  
Cut Protection Nitrile



"It is possible that gloves marked with previous standards are despatched. Cofra grants that all productions do not have technical and quality differences."

**Features**

- Gloves made with the innovative NYLIRON yarn
- It guarantees a moderate cut protection both on the palm and on the back
- Excellent flexibility and breathability
- Perfect fitting
- Touch screen functionality, usable with capacitive and resistive devices (monitors, PDAs, tablets, smartphones)

**Coating** Nitrile/polyurethane

**Lining** NYLIRON

**Gauge** 15

**Colour** Purple red/black

**Application** Assembly, industry, packaging, setup, warehouse

**Sizes**

6 (XS)	7 (S)	8 (M)	9 (L)	10 (XL)	11 (XXL)
--------	-------	-------	-------	---------	----------

**Lenght**


22 cm	23 cm	24 cm	25 cm	26 cm	27 cm
8,7"	9"	9,5"	9,9"	10,2"	10,6"

**Packaging**

Code	Quantity
G083-D100	1 dozen (12 single packed gloves)
G083-K100	Carton containing 12 dozen (144 single packed gloves)




**REINFORCED LINING - EXCELLENT DEXTERITY**

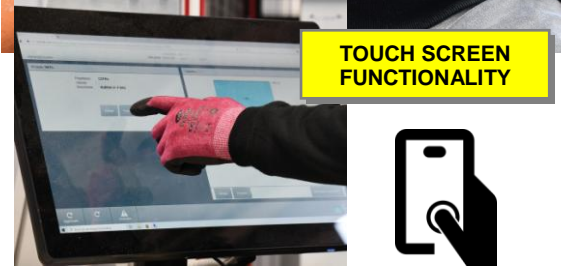

**TOUCH SCREEN FUNCTIONALITY**




**Nyliron**

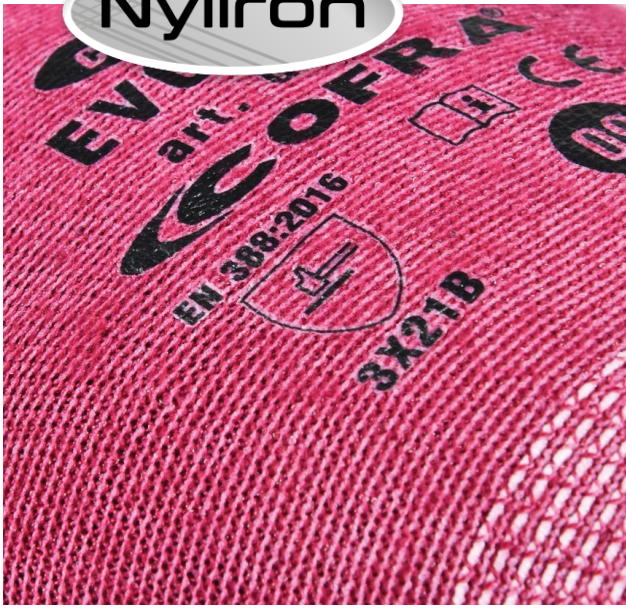

**NYLIRON yarn**

This yarn developed by COFRA joins nylon flexibility with the resistance of steel. The union of these two materials has allowed to obtain a wire with exceptional performance which ensures flexibility and lightness, allowing at the same time a better cut protection than the normal nylon, improving glove durability.

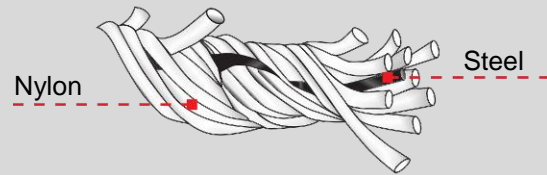

**SAFETY TECHNICAL SPECIFICATIONS**

The PPE is in compliance with essential requirements of (EU) 2016/425 regulation

STANDARD	DESCRIPTION	MINIMUM REQUIREMENT / RANGE	RESULT REACHED
EN 420:2003 + A1 2009	pH determination	3,5 < pH < 9,5	<b>7,15</b>
UNI EN 14362-1/3:2012	Carcinogenic and aromatic amines	≤ 30 ppm	<b>NOT RECORDING</b>
EN ISO 21420:2020	Further technical specifications applied	COMPLIANT / NOT COMPLIANT	<b>COMPLIANT</b>

STANDARD	DESCRIPTION	LEVEL					LEVEL REACHED
		1	2	3	4	5	
EN 388:2016+A1:2018	Abrasion resistance (number of frictions)	≥ 100	≥ 500	≥ 2000	≥ 8000	-	<b>3</b>
EN 388:2016+A1:2018	Cutting test : blade cut resistance (index)	≥ 1,2	≥ 2,5	≥ 5,0	≥ 10,0	≥ 20,0	<b>X</b>
EN 388:2016+A1:2018	Tear resistance (N)	≥ 10	≥ 25	≥ 50	≥ 75	-	<b>2</b>
EN 388:2016+A1:2018	Puncture resistance (N)	≥ 20	≥ 60	≥ 100	≥ 150	-	<b>1</b>
EN 388:2016+A1:2018 - EN ISO 13997	TDM : cutting resistance (N)	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>
		≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30
EN 388:2016+A1:2018 - EN 13594:2015	Impact protection	<b>P</b>			<b>ABSENT</b>		<b>ABSENT</b>
		Achieved			Test not executed		

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved