


**G044 - GLIDER**

*Mechanical Protection Polyurethane*

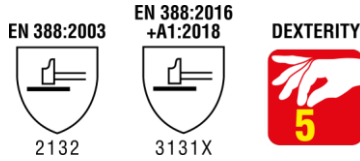

*"It is possible that gloves marked with previous standards are despatched. Cofra grants that all productions do not have technical and quality differences."*

<b>Features</b>	<ul style="list-style-type: none"> <li>Versatile</li> <li>Maximum lightness and breathability</li> <li>Highly flexible</li> </ul>
-----------------	---

<b>Coating</b>	Polyurethane
----------------	--------------

<b>Lining</b>	Polyester
---------------	-----------

<b>Gauge</b>	13
--------------	----

<b>Colour</b>	Black/black
---------------	-------------

<b>Application</b>	Warehouse, packaging, assembly, building and construction, agriculture
--------------------	--

<b>Sizes</b>	6 (XS)	7 (S)	8 (M)	9 (L)	10 (XL)	11 (XXL)
--------------	--------	-------	-------	-------	---------	----------

<b>Lenght</b>	21 cm	22 cm	23 cm	24 cm	25 cm	26 cm
	8,3"	8,7"	9"	9,5"	9,9"	10,2"

<b>Packaging</b>	<i>Code</i>	<i>Quantity</i>
	G044-D100	1 dozen (12 single packed gloves)
	G044-K100	Carton containing 20 dozen (240 single packed gloves)



**MAXIMUM LIGHTNESS**



**SAFETY TECHNICAL SPECIFICATIONS**

The PPE is in compliance with essential requirements of (EU) 2016/425 regulation

STANDARD	DESCRIPTION	RESULT REACHED
EN ISO 21420:2020	Protective gloves - General requirements and test methods	<b>COMPLIANT</b>

STANDARD	DESCRIPTION	LEVEL					LEVEL REACHED
		1	2	3	4	5	
EN 388:2016+A1:2018	Abrasion resistance (number of frictions)	≥ 100	≥ 500	≥ 2000	≥ 8000	-	<b>3</b>
EN 388:2016+A1:2018	Cutting test : blade cut resistance (index)	≥ 1,2	≥ 2,5	≥ 5,0	≥ 10,0	≥ 20,0	<b>1</b>
EN 388:2016+A1:2018	Tear resistance (N)	≥ 10	≥ 25	≥ 50	≥ 75	-	<b>3</b>
EN 388:2016+A1:2018	Puncture resistance (N)	≥ 20	≥ 60	≥ 100	≥ 150	-	<b>1</b>
EN 388:2016+A1:2018 - EN ISO 13997	TDM : cutting resistance (N)	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>X</b>
		≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	
EN 388:2016+A1:2018 - EN 13594:2015	Impact protection	<b>P</b>			<b>ABSENT</b>		<b>ABSENT</b>
		Achieved			Test not executed		

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved.